

# MTL4526 – MTL5526

## SWITCH-OPERATED RELAY

### 2-channel IS-output

The MTLX526 enables two separate IS circuits in a hazardous area to be contact controlled by one or two, on/off, control signals in a safe area. Applications include the calibration of strain-gauge bridges; changing the polarity (and thereby the tone) of an IS sounder; the testing of IS fire alarms; and the transfer of safe-area signals into an annunciator with IS input terminals not segregated from each other. The output-relay contacts are certified as non-energy-storing apparatus, and can be connected to any IS circuit without further certification, provided that separate IS circuits are such that they would remain safe if connected together.

## SPECIFICATION

See also common specification

### Number of channels

Two, fully floating

### Location of control circuit

Safe area

### Input/output characteristics

#### Contact/Logic mode

(Inputs suitable for switch contacts, an open-collector transistor or logic drive)

Relay energised if < 450Ω or < 1V applied

Relay de-energised if > 5kΩ or > 2V applied (35V max.)

#### Loop powered mode

Relay energised if >20V

Relay de-energised if <17V

### Power supply failure protection

Relays de-energised if supply fails

### Response time

25ms nominal

### Contacts (suitable for connection to IS circuits)

1-pole changeover per channel

### Contact rating

250V ac, limited to 40V dc for IS applications, 2A (reactive loads must be suppressed)


### Contact life expectancy

2 x 10<sup>7</sup> operations at maximum IS load


### Relay drive (see switch setting table)

Choice of "loop-powered" or "contact/logic" control, for both channels, by switch selection. A further switch option ("1in2out") enables either input, in contact/logic mode, to activate both outputs.

## MTL4526

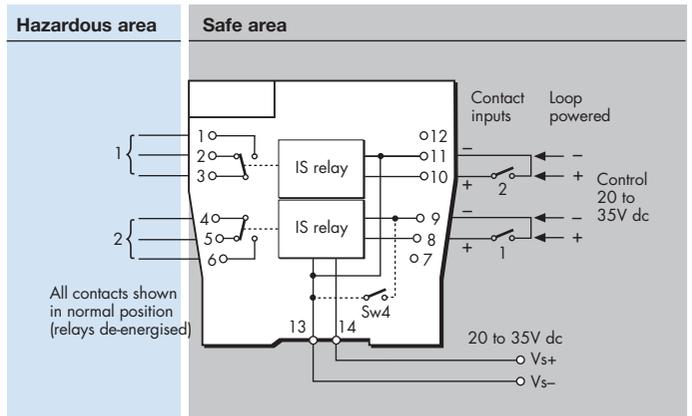

## MTL5526

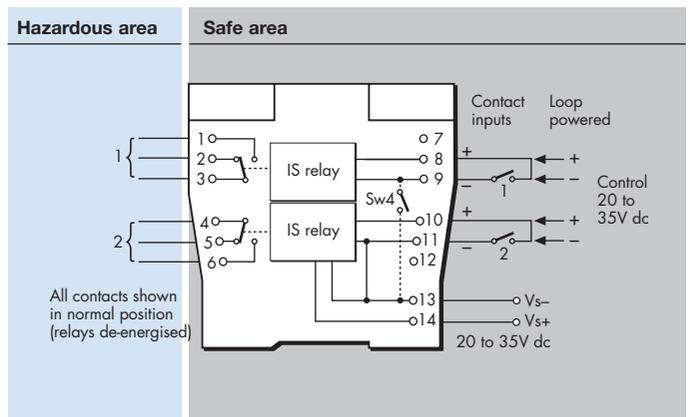

### LED indicators

Green: power indication

Yellow: two: output status, on when relay energised

### Power requirement, Vs

41mA at 20V dc

44mA at 24V dc

60mA at 35V dc

### Power dissipation within unit

1.1W maximum at 24V

### Safety description (each channel)

Non-energy-storing apparatus: relay contacts may be connected to any IS circuit without further consideration

### User switch settings for operating mode

Mode	Function	SW1	SW2	SW3	SW4
Contact/Logic	2 ch	Off	On	On	On
	1in2out	On	On	On	On
Loop Powered	2 ch	Off	Off	Off	Off

**Crouse-Hinds**  
by **EATON**

**Measurement Technology Limited,**  
Great Marlings, Butterfield, Luton  
Beds, LU2 8DL, UK.  
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283  
E-mail: mtl-enquiry@eaton.com

© 2015 MTL  
All Rights Reserved  
Publication No.  
April 2015

**EUROPE (EMEA):**  
+44 (0)1582 723633  
mtl-enquiry@eaton.com

**THE AMERICAS:**  
+1 800 835 7075  
mtl-us-info@eaton.com

**ASIA-PACIFIC:**  
+65 6 645 9888  
sales.mtlsing@eaton.com

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.

ESP526 Rev5 210513