
P861 Intrinsically Safe LED Lamp

For use in pilot lights and illuminated pushbuttons

**ATEX certified to Ex II 2G
Ex ia IIC T4**

**Available in six super-bright
colours**

Suitable for zones 1 & 2

11 year life expectancy

**Two lamps operable from a
single IIC power source**



**Can be supplied as a complete
assembly or a simple certified
LED Lamp**

**Intensity matched to provide
equally super-bright
performance for all colours**

The P861 LED Lamp provides visual on/off indication of process conditions in both safe and hazardous areas. Available in a choice of six super-bright colours (red, orange, yellow, green, blue and white), they are ideally suited for use as part of a panel mounting indicator or illuminated pushbutton assembly.

The P861 itself is a standard BA9s Intrinsically Safe LED Lamp which can be supplied as part of a pilot light or illuminated pushbutton or alternatively supplied separately to be used in any suitable standard switch or lamp assembly.

With the LED lamp being current limited to take a maximum of only 20mA, it is possible to drive two lamps from a single IIC interface without any effect on the brightness.

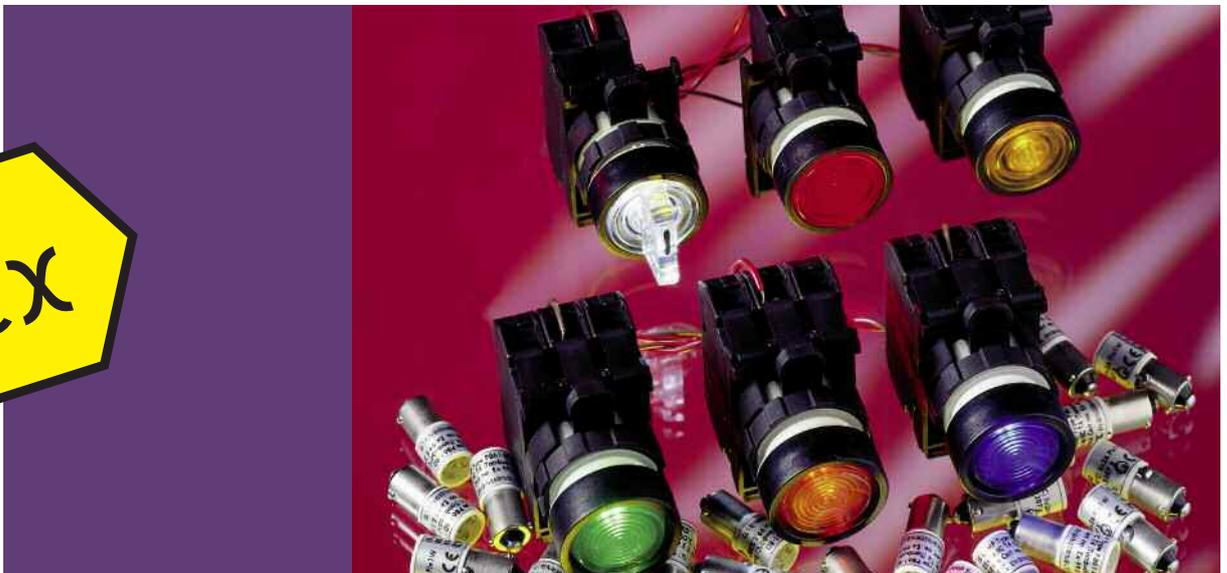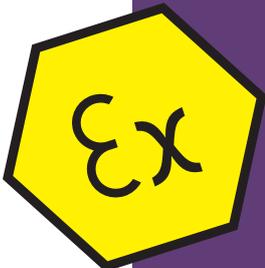

Technical Specification

Colours

The P861 Series of LED Lamps are available in six super-bright colours. Colours are red, orange, yellow, green, blue and white.

High Reliability

All LED lamps are designed to provide a minimum of 100,000 hours service life.

Low Current Consumption

All LED lamps operate at 20mA or less and feature integral current limiting to maintain consistent brightness over the operating range of the voltage supply.

Use in Hazardous Areas

In hazardous areas the LED lamps must be powered through suitable intrinsically safe Isolators or Barriers. Up to two LED lamps can be driven from a single IIC interface.


Configuration

Easy to replace or change the colour of a panel indicator. Access is from the front of the panel and no tools are required. Simply unscrew the lens and replace the BA9s LED lamp.

Certification

ATEX certified to EN60079-0:2006 and EN60079-11:2007

Group II, Category 2G, Ex ia IIC T4
(Ta -20°C to 60°C)

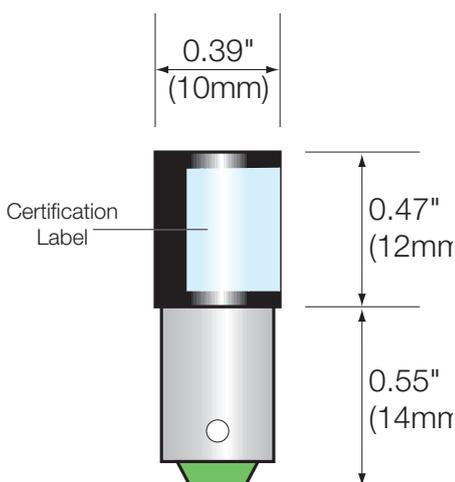

BA9s LED Lamp

The P861 LED Lamp itself has a standard BA9s fitting and, when installed in accordance with the certificate and relevant standards, can be used in any suitable pilot light or pushbutton.

Location

Zones 1 or 2. Gas Group IIC, IIB or IIA, Temp Class up to T4

Certificate No.

KEMA07ATEX0204X

Safety Parameters

Pi = 1W

Ii = 2A

Ci = 0nF

Li = 0mH

Ui = Pi/Ii for a supply circuit with non-linear current limiting

Ui = 4Pi/Ii for a supply circuit with linear current limiting

The device must be powered from an Ex ia IIC certified interface with output parameters lower than those shown above

Supply

With suitable certified interface
18-35VDC, current 20mA

Recommended Interfaces

Zener Barriers: MTL7728P+
IS Isolator: MTL5521

Environment

Operating temperature: -20°C to 60°C

Storage temperature: -20°C to 80°C

Humidity: 0-95% RH, non condensing

Compliance

Immunity to EN61000-6-2:2005

Emissions to EN61000-6-4:2007

Illuminated Pushbutton and Pilot Light

The P861 LED Lamp can be supplied as an integral part of the DA170 Series of Illuminated Pushbuttons. These are industry standard 22mm pushbuttons which can be supplied in a range of different formats such as rotary, non-illuminated and emergency stop.

See separate datasheet for full details

Construction

Housing/mounting collar – Polyimide6.6 and FR4 fibreglass

Lens – Polycarbonate

Protection

IP65 when panel mounted, IP20 from the rear


Connections

Screw terminals rated to IP20 minimum for cables from 0.5 to 2.5mm²

Mounting

Lamp – BA9s bulb holder
Pushbutton, Pilot Light – Through 22.5mm diameter hole

Order Code

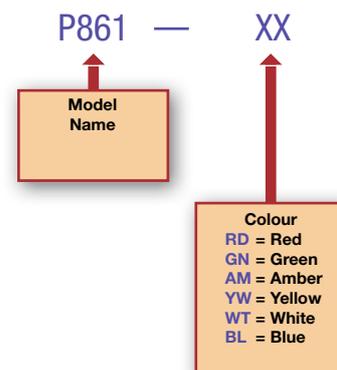

Due to our policy of continuous product development, we reserve the right to amend specifications without notice.



RTK Instruments Limited
St James Business Park,
Knaresborough, North Yorkshire,
England. HG5 8PJ

A member of the MTL Instruments Group plc

Telephone: +44 (0)1423 580500
Facsimile: +44 (0)1423 580501
Web: www.rtkinstruments.com
Email: enquiry@rtkinstruments.com